

VACOMAT 200 XP(E) MOBILE DUST EXTRACTOR



TECHNICAL SPECIFICATION

Vacomat	200 XP*	200 XPe**
Art. no.	621 800	621 100
Suction nozzle Ø (mm)	200	200
Motor (kW)	4.0	4.0
Max. flow. rate (m ³ /h)	2,495	2,495
Nominal volume flow at 20 m/s (m ³ /h)	2,262	2,262
Suction pressure (pa)	2,000	2,000
Filter surface area (m ²)	14.5	14.5
Weight (kg)	500	500
Sound pressure level (dB[A])	73	73
Chip collection volume capacity (l)	3 x 160	3 x 160

*XP = With pneumatic / mechanical cleaning via compressed air connection

**XPe = With electromechanical cleaning via shaker motor

DESCRIPTION


The Vacomat 200 XP(e) mobile dust extractor is the ideal filtration system for single- or multi-machine extraction. Reliable airflows of up to 2,495 m³/h are possible with this negative pressure system, making it ideal for, e.g., dust extraction from panel saws and small bandsaws.

In the standard version extraction is started manually with the push of a button. Automatic fan start-up upon switch-on of the connected machine tools can be installed upon request to avoid operating errors such as not switching the extraction on when there is a load or switching it on when there is no load.

Dust and chips are discharged to three dust-tight plastic sack-lined chip collection tanks (3 x 160 l). A negative pressure duct holds the film sack in place in the collection tank. Inspection windows are provided for level checking. A level monitor can optionally be installed to prevent overflow.

The mobile dust extractor monitors the extraction performance via a load cell to ensure maximum operational reliability.

Rather than discharging to three chip collection tanks, it is possible to integrate a chip tank to enable low-dust disposal via a Schuko briquetting press.

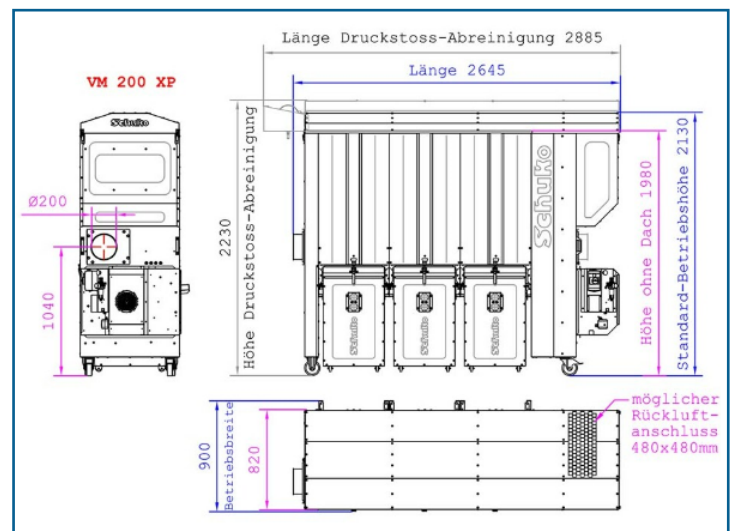

FEATURES

- Space-saving dust extractor for single- or multi-point extraction
- Can be combined with a Schuko briquetting press
- H3 and GS test marks, dust class M
- Equipped with externally loaded filter bags
- Delivered preassembled and ready to plug in for immediate use

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

VACOMAT 200 XP(E) MOBILE DUST EXTRACTOR


SCHUKOCONE FILTERS

The Vacomat 180 XP(e) mobile dust extractor comes with patented SchukoCone® filter bags as a standard feature.

The SchukoCone® filter is a successful combination of an externally loaded filter bag and an internally loaded cone. For today's system constructions this means approx. 60% more filter surface area with the same length and an up to 50% larger expansion chamber than in traditional dust extraction systems.

SchukoCone® filters should particularly be used for fine dust requiring a high filter surface area and a low filter surface loading rate because it is especially in such applications that the filters realise their tremendous potential.

With a decrease in filter surface loading rate a longer filter life is reached. The filter resistance drops and hence a lower fan output and less power are required.

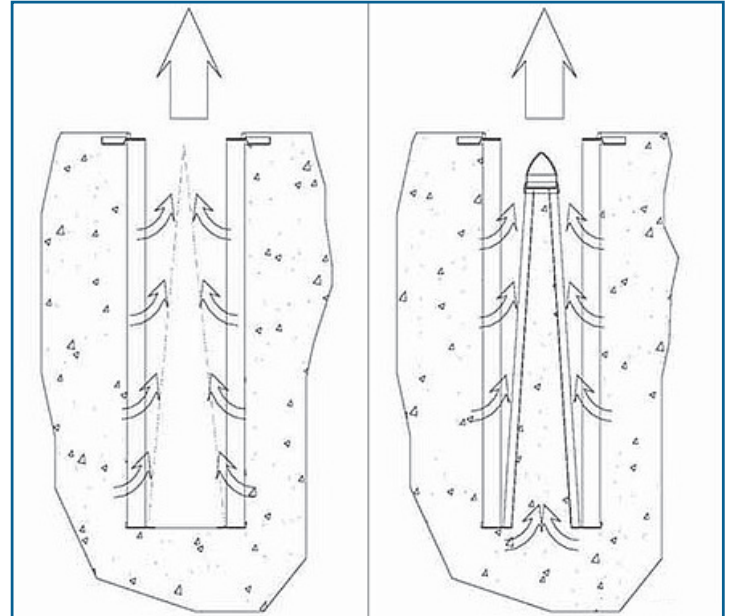

Filter hoses in comparison:
left: conventional filter bag right: SchukoCone filter hose



FILTER REGENERATION - XP OR XPe?

Filters in the **Vacomat 200 XP** are cleaned by a combined pneumatic and mechanical action. Dust and chips are expelled gently from the filter in a patented 'shake-off' process when a compressed air supply is connected. As soon as the dust extractor is switched off, the regeneration mechanism can be started by hand.

In the **Vacomat 200 XPe** an integrated switchgear cabinet is used for electromechanical cleaning via a shaker motor. Activation occurs via querying of the woodworking machine via floating contacts. As soon as all connected machines are off the motorised filter shaker starts automatically. For the regeneration mechanism no connection to a compressed air supply and thus no compressor is necessary. This leads to a significant reduction in noise during cleaning.

Recommended particularly for very high and very fine dust contents, an efficient pressure surge cleaning system (XP-D or XPe-D) is optionally available (NOTE: overall height then +100 mm and length +350 mm). Cleaning is carried out offline via the compressed air tank after extraction.

VACOMAT 200 XP(E) MOBILE DUST EXTRACTOR


INSTALLATION & ITEMS DELIVERED

Vacomat 200 XP(e) mobile dust extractors are delivered preassembled and ready to plug in (high-voltage current 16 A, with 6 m cable) on single-use pallets (included). A set of chip bags (3 pcs, size V) is also included.

Various components can be used to connect the **Vacomat 200 XP** directly to one or more machines for operation. Installation or electrical work is usually not required. However, the **Vacomat 200 XPe** must be electronically connected to the machine tools to enable automatic triggering of filter bag regeneration when the machine tools are shut off. An electronics company can help. The supplied switchgear cabinet with integrated phase inverter is prepared for querying of a floating contact as well as three transducer coils (coils are not included).

The dust extractor is directly connected to the machines for extraction (connection nozzle size of 200 mm) with a flexible hose or rigid ductwork. Some of the connection parts can be found in the accessories section as well as our system components section.

Equipped with stable industrial-grade casters, the mobile dust extractor can be set up flexibly anywhere in your workshop. Need extraction for a different machine? Just release the brakes on the two casters and push the unit to the required location.

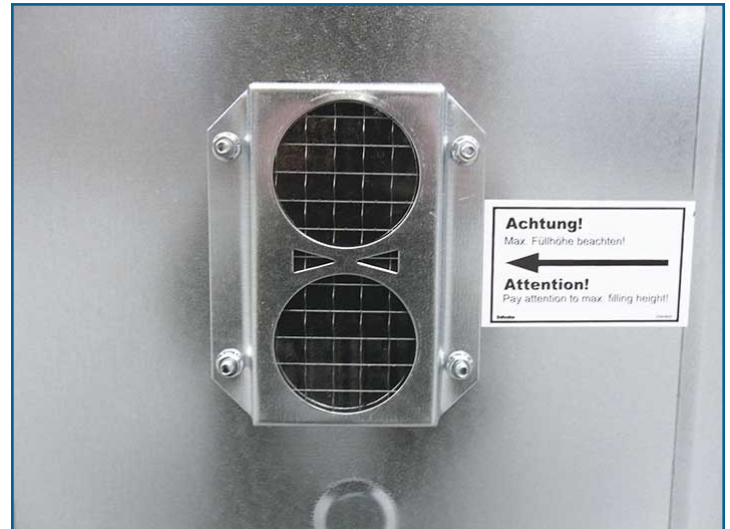

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT